


PROCESS SOLUTIONS
FOR HOTMELT COOLING

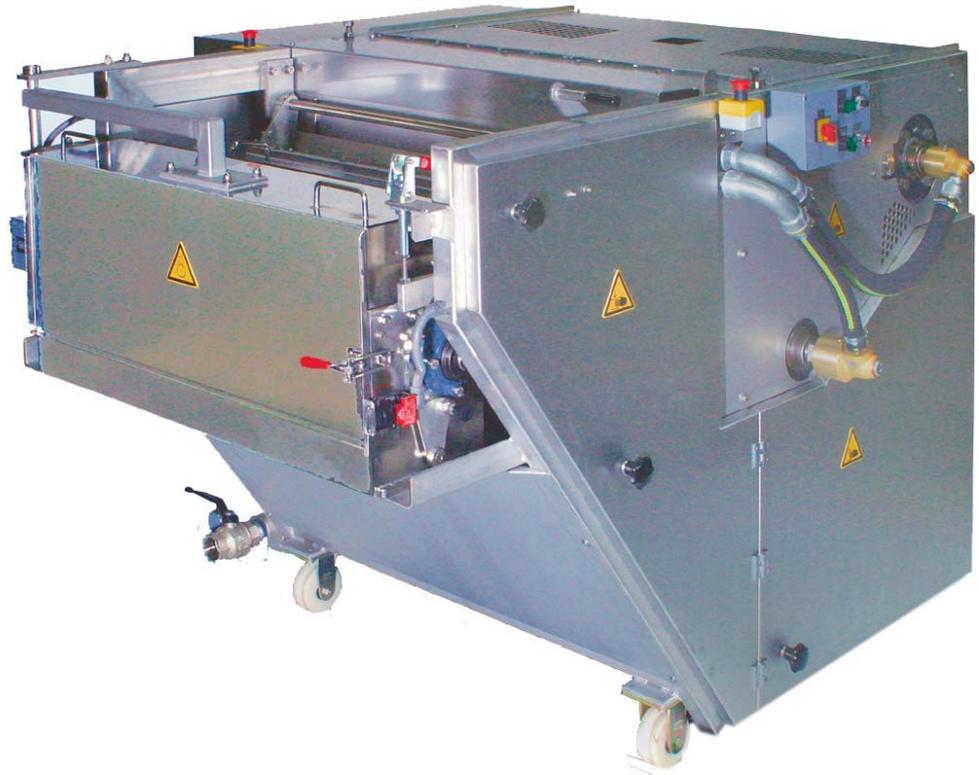

DrumCooler

Type CCC-95/60
Type CCC-95/100

The DrumCooler type CCC are designed for continuous cooling and solidification of viscous products. They are distinguished by its high cooling efficiency as well as its minimum space requirement and small footprint.


The product, which has been rolled into a thin film, is pressed up against the surface of a cooled drum and is fed into a crusher unit.

Your benefits

- Compact design
- Closed water loop of cooling media
- Adjustable calender nip to control product layer thickness
- Special design featuring easy access and quick cleaning
- Stainless steel execution
- Narrow distribution of the chip sizes
- Throughput

CCC-95/60
ca. 450 kg/h
depends on product and production parameters

CCC-95/100
ca. 750 kg/h

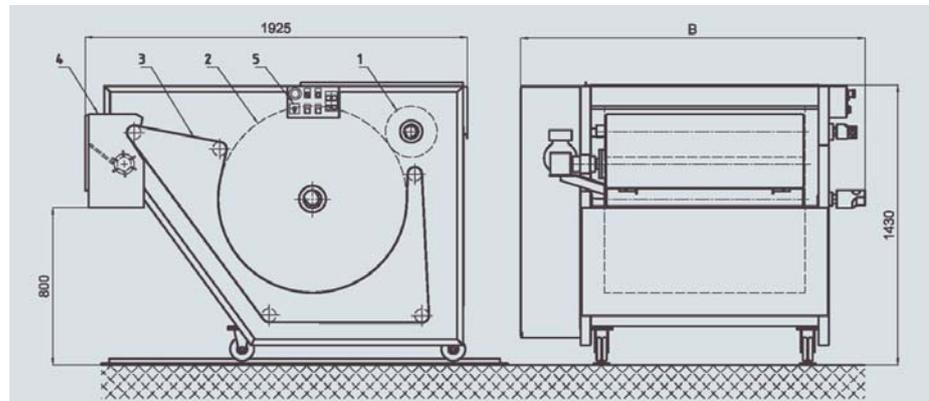

Legend:

Pos. 1 Squeezing drum
Pos. 3 Conveyor belt

Pos. 2 Cooling drum
Pos. 5 Control panel

Pos. 4 Crusher unit

Technical data:

		CCC-95/60	CCC-95/100
Overall width	B	1340 mm	1740 mm
Overall length		1925 mm	
Product inlet height		1430 mm	
Discharge height		800 mm	
Width of cooling drum		610 mm	910 mm
Ø Squeezing drum		260 mm	
Ø Cooling drum		950 mm	
Power consumption		2.3 kW	
Total net weight		1550 kg	1750 kg



Options:

- Elektro-mechanical moving device
- Micro-crusher shaft
- Special material layer on drums available

